



BRUTE™

Buy Parts Now at
amazon.com >

by



Illustrated Parts List

Pressure Washer / Lavadora de Presión



This pressure washer is rated in accordance to the Pressure Washer Manufacture Association (PWMA) Standard PW101 (Testing and Rating Performance of Pressure Washers).

Questions? Help is just a moment away!
Preguntas? La ayuda es justa un momento lejos!
Call: Pressure Washer Helpline

Llame: Línea Directa del Lavadora a Presión - 1-800-743-4115 M-F 8-5 CT

Brute™ is a registered trademark of Briggs & Stratton Power Products, LLC.
Brute™ es una marca de Briggs & Stratton Power Products, LLC.

Model / Modelo

Mfg. No.	Description / Descripción
020409-0	2,500 PSI Brute

Manual Part No. 310340

Revision B

Rev. Date: 12/12/2011

[Click here to find your part on Amazon](#)



Not for
Reproduction

[Click here to find your part on Amazon](#)

PRODUCT COMPONENTS

	PAGES
Main Unit	4
Pump	6
Torque Specification Chart	Inside Back Cover


Not for
Reproduction

Main Unit

NOTE: Unless noted otherwise, use the standard hardware torque specification chart.

Buy Parts Now at
amazon.com

90

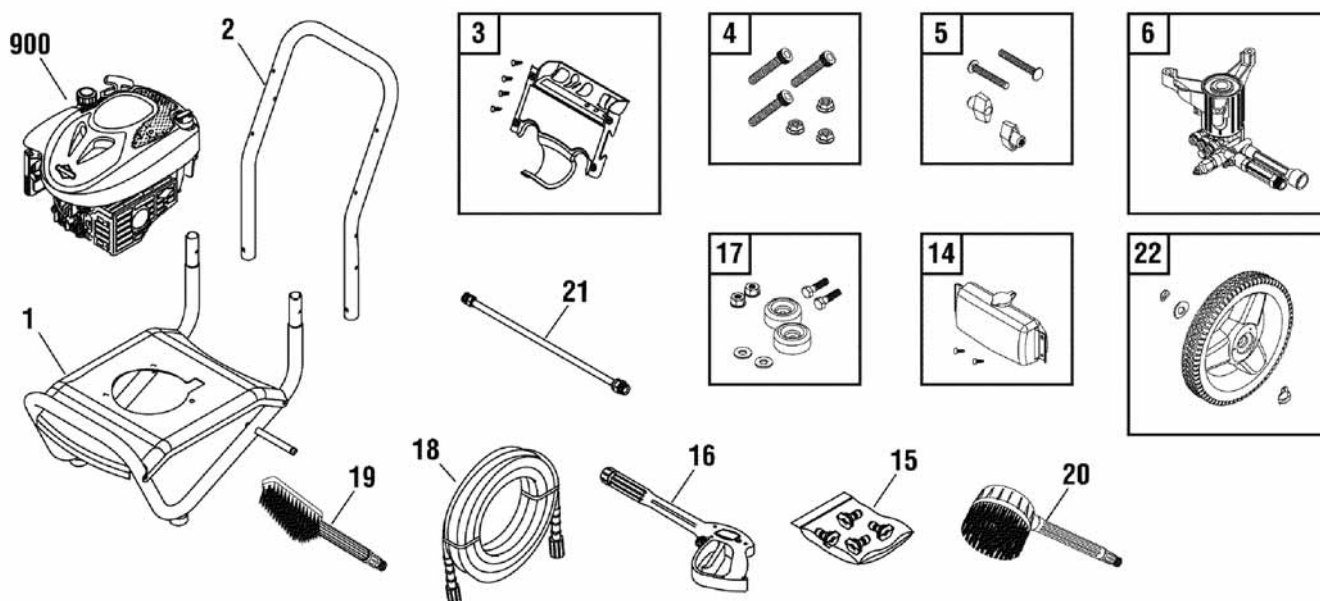

REF.	PART NO.	DESCRIPTION	REF.	PART NO.	DESCRIPTION
1	204921GS	BASE	19	196534GS	BRUSH, Utility
2	B199110GS	HANDLE	20	196535GS	BRUSH, Rotating
3	204923GS	BILLBOARD	21	193811GS	EXTENSION, QC
--	B1797GS	KIT, Tree Clips	22	204922GS	KIT, Wheel
4	203526GS	KIT, Hardware, Pump Mounting	--	206625GS	WASHER
5	B2203GS	KIT, Hardware, Handle	--	207526GS	RING, Snap
6	202274GS	PUMP	--	205418GS	DECAL
14	205369GS	TANK, Chemical	23	205418GS	DECAL
--	310333GS	KIT, Fuel Valve	900	----	* ENGINE
--	B3222EGS	CAP, Chemical Tank	--	207154GS	MANUAL, Operator's (Not Illustrated)
15	207977GS	KIT, QC Nozzles	--	BB3061BGS	OIL BOTTLE (Not Illustrated)
--	195983AGGS	NOZZLE, QC, Green	--	794693	LABEL, Warning (Not Illustrated)
--	195983AEGS	NOZZLE, QC, Red	--	A1040NGS	HOSE, Chemical (Not Illustrated)
--	198841GS	NOZZLE, QC, Black	--	208538GS	DECAL, Warning, Spark (Not Illustrated)
16	204627GS	GUN	--	194256GS	KIT, Tag Warning, With Clip (Not Illustrated)
17	192310GS	KIT, Vibration Mount	--	6039	PUMP SAVER (Optional Accessory)
18	196006GS	HOSE, 25'			

Footnotes

* Contact Engine Manufacturer for Parts & Service.

The above parts group applies to the following Mfg. Nos.:


020409-0 - 2,500 PSI Brute

Main Unit

NOTE: Unless noted otherwise, use the standard hardware torque specification chart.

Buy Parts Now at
amazon.com >

90

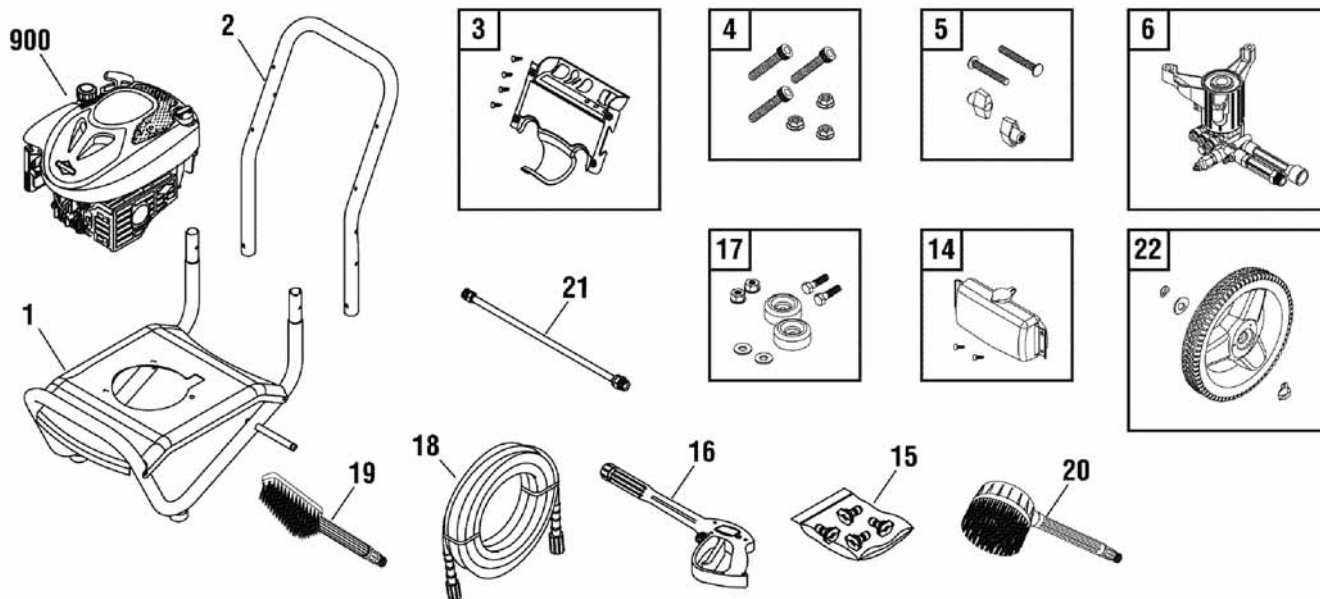

REF.	PART NO.	DESCRIPTION	REF.	PART NO.	DESCRIPTION
--	6048	KIT, O-Ring Maintenance (Optional Accessory)			

Footnotes

* Contact Engine Manufacturer for Parts & Service.


The above parts group applies to the following Mfg. Nos.:

020409-0 - 2,500 PSI Brute

Pump

NOTE: Unless noted otherwise,
use the standard hardware torque
specification chart.

Buy Parts Now at
amazon.com > RV

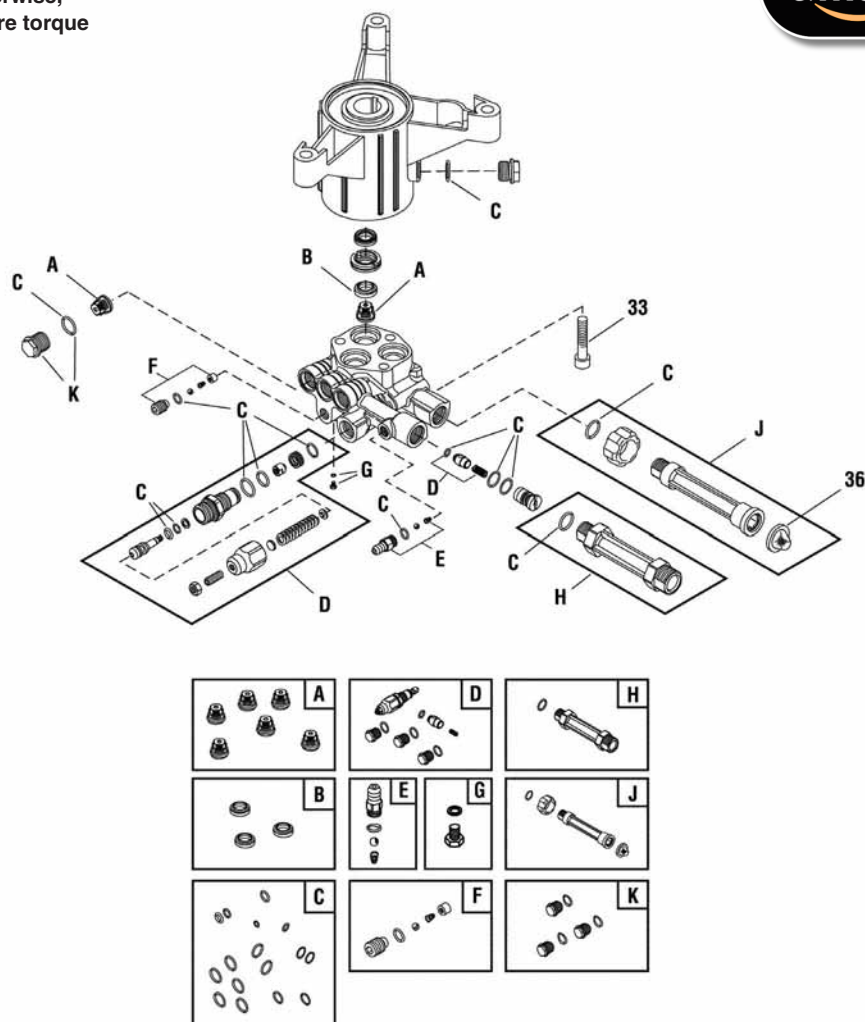

REF.	PART NO.	DESCRIPTION	REF.	PART NO.	DESCRIPTION
33	200275GS	SCREW			
36	B2384GS	FILTER, Garden Hose			
A	200344GS	* KIT, Check Valve			
B	200345GS	* KIT, Water Seal			
C	200346GS	* KIT, O-Ring			
D	315747GS	* KIT, Unloader			
E	192914GS	* KIT, Chemical Injection			
F	200349GS	* KIT, Easy Start			
G	200350GS	* SCREW, Grub			
H	201497GS	* FITTING			
J	201496GS	* KIT, Water Inlet			
K	317056GS	* KIT, Plug			
--	208673GS	VALVE, Thermo Relief (Not Illustrated)			
--	6039	PUMP SAVER (Optional Accessory)			
--	6033	OIL BOTTLE (Optional Accessory)			

Footnotes

* Service Kit includes all parts shown in box.

The above parts group applies to the following Mfg. Nos.:

020409-0 - 2,500 PSI Brute

Hardware Identification & Torque Specifications

Buy Parts Now at
amazon.com

Torque Specification Chart

FOR STANDARD METRIC MACHINE HARDWARE (Tolerance $\pm 20\%$)

Property Class	Class 5.6		Class 8.8		Class 10.9		Class 12.9	
Size Of Hardware	in/lbs ft/lbs	Nm.	in/lbs ft/lbs	Nm.	in/lbs ft/lbs	Nm.	in/lbs ft/lbs	Nm.
M3	5.88	.56	13.44	1.28	19.2	1.80	22.92	2.15
M4	13.44	1.28	30.72	2.90	43.44	4.10	52.56	4.95
M5	26.4	2.50	60.96	5.75	5.97	8.10	7.15	9.7
M6	44.64	4.3	7.3	9.9	10.3	14	12.1	16.5
M7	5.2	7.1	12.1	16.5	16.9	23	19.9	27
M8	7.7	10.5	17.7	24	25	34	29	40
M10	15	21	35	48	50	67	59	81
M12	26	36	61	83	86.2	117	103	140
M14	42	58	101	132	136	185	162	220
M16	64	88	147	200	210	285	250	340
M18	89	121	202	275	287	390	346	470
M20	126	171	290	390	405	550	486	660
M22	169	230	390	530	559	745	656	890
M24	217	295	497	375	708	960	840	1140
M27	320	435	733	995	1032	1400	1239	1680
M30	435	590	995	1350	1401	1900	1681	2280
M33	590	800	1349	1830	1902	2580	2278	3090
M36	759	1030	1740	2360	2441	3310	2935	3980
M39	988	1340	2249	3050	3163	4290	3798	5150


The guides and ruler furnished below are designed to help you select the appropriate hardware.



Nut, M8

Thread Diameter (mm)
Inside Diameter (in)
Threads per inch


Nut, 1/2-16



Screw, M8- 1.25 x 25

Thread Diameter (mm)
Body Diameter
Distance between threads (mm)
Threads per inch
Body Length (mm)
Body Length (in)

Screw, 1/2- 16 x 2



Standard Hardware Sizing

When a washer or nut is identified as **1/2"** (M8), this is the *Nominal size*, meaning the *inside diameter* is 1/2 inch (8mm metric thread diameter); if a second number is present it represents the *threads per inch* (distance between threads).

When bolt or capscrew is identified as **1/2 - 16 x 2"** (M8 - 1.25 x 50), this means the *Nominal size*, or body diameter is 1/2 inch (8mm metric thread diameter), the second number, 16, represents the *threads per inch*, (1.25 thread diameter). The final number is the body length of the bolt or screw, 2 inches (50mm).

Torque Specification Chart

FOR STANDARD METRIC MACHINE HARDWARE (Tolerance $\pm 20\%$)

Hardware Grade	SAE Grade 2		SAE Grade 5		SAE Grade 8	
Size Of Hardware	in/lbs ft/lbs	Nm.	in/lbs ft/lbs	Nm.	in/lbs ft/lbs	Nm.
8-32	19	2.1	30	3.4	41	4.6
8-36	20	2.3	31	3.5	43	4.9
10-24	27	3.1	43	4.9	60	6.8
10-32	31	3.5	49	5.5	68	7.7
1/4-20	66	7.6	8	10.9	12	16.3
1/4-28	76	8.6	10	13.6	14	19.0
5/16-18	11	15.0	17	23.1	25	34.0
5/16-24	12	16.3	19	25.8	29	34.0
3/8-16	20	27.2	30	40.8	45	61.2
3/8-24	23	31.3	35	47.6	50	68.0
7/16-14	30	40.8	50	68.0	70	95.2
7/16-20	35	47.6	55	74.8	80	108.8
1/2-13	50	68.0	75	102.0	110	149.6
1/2-20	55	74.8	90	122.4	120	163.2
9/16-12	65	88.4	110	149.6	150	204.0
9/16-18	75	102.0	120	163.2	170	231.2
5/8-11	90	122.4	150	204.0	220	299.2
5/8-18	100	136	180	244.8	240	326.4
3/4-10	160	217.6	260	353.6	386	525.0
3/4-16	180	244.8	300	408.0	420	571.2
7/8-9	140	190.4	400	544.0	600	816.0
7/8-14	155	210.8	440	598.4	660	897.6
1-8	220	299.2	580	788.8	900	1,244.0
1-12	240	326.4	640	870.4	1,000	1,360.0

NOTES

- These torque values are to be used for all hardware excluding: locknuts, self-tapping screws, thread forming screws, sheet metal screws and socket head setscrews.
- Recommended seating torque values for locknuts:
 - for prevailing torque locknuts - use 65% of grade 5 torques.
 - for flange whizlock nuts and screws - use 135% of grade 5 torques.
- Unless otherwise noted on assembly drawings, all torque values must meet this specification.

Common Hardware Types

Hex Head Capscrew



Washer

Lockwasher

Carriage Bolt



Hex Nut

Wrench & Fastener Size Guide

1/4" Bolt or Nut Wrench—7/16"	5/16" Bolt or Nut Wrench—1/2"	3/8" Bolt or Nut Wrench—9/16"	7/16" Bolt or Nut Wrench (Bolt)—5/8" Wrench (Nut)—11/16"	1/2" Bolt or Nut Wrench—3/4"
M6 Bolt or Nut Wrench—10mm	M8 Bolt or Nut Wrench—13mm	M10 Bolt or Nut Wrench—17mm	M12 Bolt or Nut Wrench—19mm	M14 Bolt or Nut Wrench—22mm

[Click here to find your part on Amazon](#)

Buy Parts Now at
amazon.com >



BRUTE™

by



Not for
Reproduction

Briggs & Stratton Power Products Group, LLC

Copyright© 2011 Briggs & Stratton Power Products Group, LLC. All rights reserved. No part of this page can be reproduced or transmitted in any form by any means without the express written permission of Briggs & Stratton Power Products Group, LLC.

[Click here to find your part on Amazon](#)